


法兰形U-NUT规格表

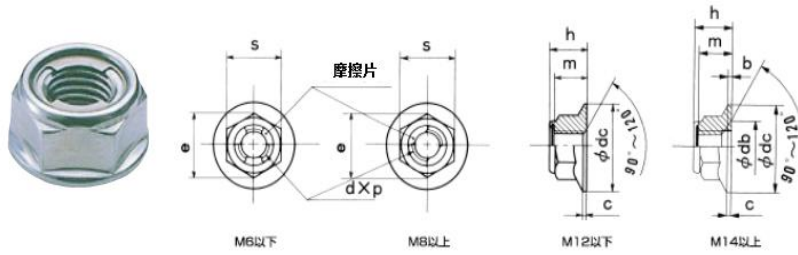

螺纹精度: JIS6H (2级)

○ 为标准品
△ 为订制品

螺母本体材质													SS400	S45C	单重 (g)								
摩擦片材质													SUS301	SUS301									
称呼 (d)	节距 (p)	对面宽度(s)		法兰座径(φ dc)		总高度(h)		螺纹高 (m) 约	法兰孔深 (b)	法兰孔内径(φ db)		法兰边厚 (c)	强度区分										
		尺寸	公差	尺寸	公差	尺寸	公差			尺寸	公差		6T	8T									
M5	0.8	8	0	11		6	±0.3	5.3				1	○		2.0								
M6	1	10	-0.2	13		6.9		6				1.2	○		3.5								
M8	1.25	12	0	17	-0.4	8.5	±0.4	7.5	-	-	-	1.5	○	○	6.8								
		14										○		8.3									
M10	1.25	14				-0.25						19	20	10	±0.4	8.8	-	-	-	1.7	○	○	9.2
		17																		○		13.7	
M12	1.25	17	0	24	-0.5	12.5	±0.5	11.2	2	13	±0.3	1.4	○	△	17.4								
		19						△					20.5										
M14	1.5	19				-0.35		26	±0.5	15		±0.5	13.5	3	17	±0.3	1.6	○		22.6			
		22											△					29.8					
M16	1.5	22	-0.35	30	±0.5	16.5	±0.5	15	3	17	±0.3		3.0	○			35.7						
		24				○							41.5										
M18	1.5	24	-0.35	32	±0.5	18		±0.5	16.5	3		20	±0.3	3.0	○	△	41.7						
		27				○								55.0									