


内六角螺栓用碟簧垫圈规格表

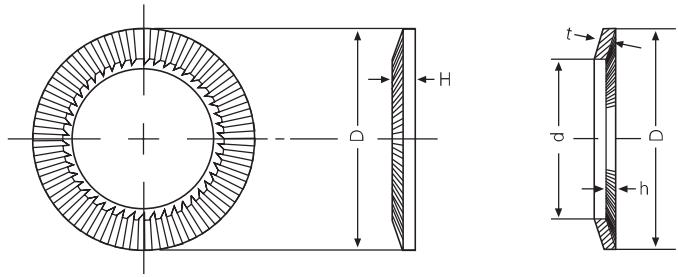

CDW-L (轻负荷用)

型号	d		D		t		H	试验负荷 KN
	基本尺寸	公差	基本尺寸	公差	基本尺寸	公差	基本尺寸	
3	3.20	+0.25 0	5.50	0 -0.25	0.45	±0.035	0.60	1.03
4	4.25		7.00		0.50	±0.035	0.70	1.77
5	5.25		8.5		0.60	±0.04	0.85	2.94
6	6.40	+0.30 0	10.0	0 -0.30	0.70	±0.045	1.00	4.12
8	8.40		13.0		0.80	±0.05	1.20	7.45
10	10.60		16.00		1.00	±0.055	1.50	11.77
12	12.60		18.00		1.20	±0.065	1.70	17.65
14	14.60	+0.40 0	21.00	0 -0.40	1.40	±0.07	1.95	23.54
16	16.90		24.00		1.60	±0.08	2.25	32.36
18	18.90		27.00		1.80	±0.085	2.55	39.23
20	20.90		30.00		2.00	±0.09	2.80	49.03
22	22.90	+0.50 0	33.00	0 -0.50	2.30	±0.10	3.10	61.78
24	25.40		36.00		2.50		3.40	71.59
27	28.20		40.00		2.60	3.70	93.16	
30	31.20		45.00		3.00	±0.11	4.20	117.68
33	34.50	50.00	3.20	4.60	137.29			
36	37.50	54.00	3.50	5.00	166.71			
39	40.50		58.00		3.80		5.40	196.13

CDW-H (重负荷用)

型号	d		D		t		H	试验负荷 KN
	基本尺寸	公差	基本尺寸	公差	基本尺寸	公差	基本尺寸	
6	6.40	+0.30 0	10.00	0 -0.30	1.00	±0.055	1.25	8.24
8	8.40		13.00		1.20	±0.065	1.55	14.71
10	10.60		16.0		1.50	±0.075	1.90	23.54
12	12.60		18.0		1.80	±0.085	2.20	34.32
14	14.60	+0.40 0	21.0	0 -0.40	2.00	±0.09	2.50	47.07
16	16.90		24.0		2.30	±0.10	2.80	63.74
18	18.90		27.0		2.60		3.15	78.45
20	20.90		30.0		2.80		3.55	98.07
22	22.90	+0.50 0	33.0	0 -0.50	3.20	±0.11	3.90	122.58
24	25.40		36.0		3.50		4.25	142.20
27	28.20		40.0		3.80	4.75	186.33	
30	31.20		45.00		4.20		5.20	225.55

●材质 S50C~70C、SUP10 ●硬度 HRC40~48

注：压缩试验后，基本尺寸H保证如下：轻负荷L型为80%以上，重负荷H型为83%以上。